

# Royalux 2



Brass finish



White finish

The latest generation of Royalux offers the benefits of automatic testing and modern legend technology, but without losing its popular traditional styling. Choice of classical white or the high lustre brass or chrome plated finish and elegant bevelled design make Royalux 2 ideal for prestigious locations, such as hotels, boardrooms and theatres. Traditional fluorescent versions are now complemented by the latest LED technology ideal for maintained usage where long illumination periods are encountered. Advanced automatic test options permit the styling of Royalux to be employed in applications where ease of testing is paramount.

- BSI kitemarked for peace of mind
- ICEL registered with verified light performance
- Classical styling
- High quality brass/chrome plate or painted white finish
- Long life 50,000 hour LED version
- Uniformly lit legend, compliant with EN1838
- Available in self-contained, AC/DC and AC mains slave versions
- EasiCheck, Intellem and CeaGuard self test versions

### Lamp Options

- 8W T5 - fluorescent 3500°K G5 cap T5 
- 3W LED strip


### Materials

- Body - steel frame, brass/chrome plated or white paint cover
- Legend - clear acrylic with pre applied legend
- Batteries - (self-contained versions) - NiCd

### Installation Notes

- Mounting plate direct screw fixed with rear cable entry
- 2 x 1000mm suspensions supplied, adjustable on site
- Power supply cable linking body to mounting plate supplied

### Dimensions

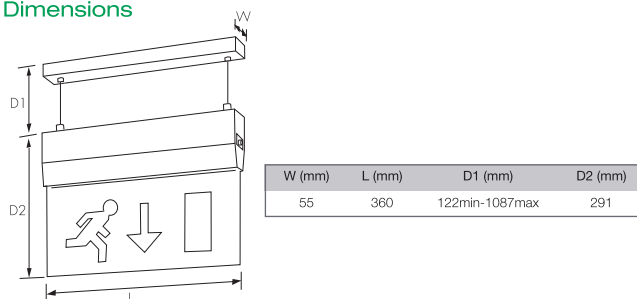


### Options

- Maintained and non-maintained, 3 hour duration
- Intellem self test. Technology detailed on page 309
- EasiCheck addressable testing. System detailed on page 304
- Central system slave versions
- Choice of legend panels

### Specification



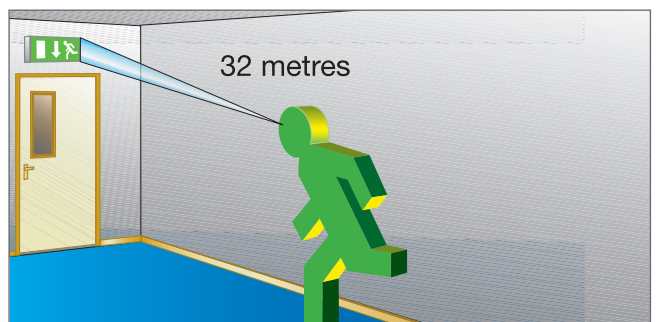


Self contained - To specify state: Edge-lit self-contained emergency sign, with adjustable suspension, white/brass/chrome finish and legend panels fully compliant with EN 1838, as JSB Royalux 2 range, part no. \_\_\_\_\_

### Maximum Viewing Distance



### Catalogue Numbers

System Mode	Brass Finish	Chrome Finish	White Finish	Weight (kg)
<b>Fluorescent</b>				
Non-Maintained 3Hr	RLX2N	RLX2NCH	RLX2NWH	2.0
Maintained 3Hr	RLX2M	RLX2MCH	RLX2MWH	2.0
Maintained 3Hr Self-test	RLX2MIS	RLX2MCHIS	RLX2MWHIS	2.0
Maintained 3Hr EasiCheck	RLX2MEC	RLX2MCHEC	RLX2MWHEC	2.0
Maintained 3Hr EasiCheck 2	RLX2MEC2	RLX2MCHEC2	RLX2MWHEC2	2.0
230V Ceaguard Slave	RLX2230CG	RLX2230CHCG	RLX2230WHCG	1.7
230V AC Mains Slave	RLX2230	RLX2230CH	RLX2230WH	1.7
230V AC Mains Slave EasiCheck	RLX2230EC	RLX2230CHEC	RLX2230WHEC	1.7
50V AC/DC Central System Slave	RLX250	RLX250CH	RLX250WH	1.7
110V AC/DC Central System Slave	RLX2110	RLX2110CH	RLX2110WH	1.7
<b>LED</b>				
Maintained / Non-Maintained 3Hr	RLX2LM	RLX2LMCH	RLX2LMWH	2.0
Maintained 3Hr Self-test	RLX2LMIS	RLX2LMCHIS	RLX2LMWHIS	2.0
Maintained 3Hr EasiCheck	RLX2LMEC	RLX2LMCHEC	RLX2LMWHEC	2.0
Maintained 3Hr EasiCheck 2	RLX2LMEC2	RLX2LMCHEC2	RLX2LMWHEC2	2.0
230V Ceaguard Slave	RLX2L230CG	RLX2L230CHCG	RLX2L230WHCG	1.7
230V AC Mains Slave	RLX2L230	RLX2L230CH	RLX2L230WH	1.7
230V AC Mains Slave EasiCheck	RLX2L230EC	RLX2L230CHEC	RLX2L230WHEC	1.7
Primary product for an optimised energy efficient lighting solution				

Legend Panel	Pictogram	Cat No	Weight (kg)
Down arrow - single sided		RMADS	0.75
Left arrow - single sided		RMLDS	0.75
Right arrow - single sided		RMRDS	0.75
Left and right arrow - double sided		RMAD	0.75
Down arrow - double sided		RMALR	0.75