

Exed, Intrinsically Safe (Exia), Weatherproof BG Range



Introduction

These manual alarm Call Points have been designed for use in hazardous locations and harsh environmental conditions. The Glass Reinforced Polyester enclosures are suitable for use both onshore and offshore, where light weight combined with a high level of corrosion resistance is required.

The break glass is covered by a membrane which protects the operator from glass fragments meaning that no hammer is required to activate the unit.

A plastic 'break glass' or deformable operating element is available to replace the break glass. Once the flexible element is pressed it will bend but will not break. The unit is reset by repositioning the element.



Features

- ATEX certified.
- IECEx certified.
- UL listed for Haz locs.
- UL listed for Ord locs
- GOST 'R' certified.
- Chinese (CQST) certified.
- Brazilian (Inmetro) certified.
- IP66 and IP67.
- Corrosion free GRP construction.
- SIL 2 certified.
- A variety of colours available.
- Up to 9 terminals available.
- Optional LED – indicates that the unit has been operated.
- Earth continuity option for metal glands.
- 1 or 2 changeover switches.
- Captive cover screws.
- Key operated test facility – simple but secure.
- Breakglass hammer available.



Certification and Specification

ATEX Exe:	Cert. no. BAS02ATEX2105X. ATEX Approved Ex II 2G. Certified to: EN50014, EN50018, EN50019, EN50028. Exed IICT6 (switch only), Exedm IICT4 (other versions).
ATEX Exia:	Cert no. Baseefa 03ATEX0084X. ATEX Approved Ex II 1GD Certified to: EN60079-0, EN60079-11. Ex ia IIC T4 Ga (-40°C ≤ Ta ≤ +70°C), Ex ia IIIC T135°C Da (-40°C ≤ Ta ≤ +70°C).
IECEX Exia:	Cert. no. IECEX BAS 12.0093X. Certified to: IEC 60079-0, IEC 60079-11. Ex ia IIC T4 Ga (-40°C ≤ Ta ≤ +70°C), Ex ia IIIC T135°C Da (-40°C ≤ Ta ≤ +70°C).
UL:	Listing no. E186629 UL listed to Class 1, Div 2. Groups A – D. UL listed for Ordinary Locations. Listing no. S8117
GOST R Exe:	2Exed IICT6 (switch only), 2Exedm IICT4 (other versions). Russian Fire Approved.
GOST R Exia:	Exia IICT4. Russian Fire Approved.
Inmetro Exe:	Ex de mb IIC T4 Gb, Ex de IIC T6 Gb.
Inmetro Exia:	Ex ia IIC T4 Ga.
CQST Exe:	Exed IICT6 (switch only), Exedm IICT4 (other versions).
CQST Exia:	Exia IIC T4.
SIL:	SIL 2 certified to IEC 61508. Cert no. Sira 11013
Type Apps:	American Bureau of Shipping type approval (ABS). (BGE only)
Material:	Anti-static UV resistant glass reinforced polyester.
Finish:	Red painted finish as standard or to customer specification.
Voltage:	Up to 254V a.c. Up to 28V d.c.
Weight:	1.2 kg. (Varies with models and entries).
Ingress Protection:	IP66 & IP67.
Entries:	Up to 4 entries, M16 or M20 top and bottom (1/2" NPT available on UL version).
Terminals:	6 x 2.5mm ² – standard (BGUL only). 7 x 2.5mm ² – standard. 9 x 2.5mm ² optional – up to 60V only.
Resistors:	Various configurations available on versions up to 24V and all 'IS' versions. (Minimum Resistor value 100ΩPBE/BGE, 470ΩPBI/BGI).
Earth Continuity:	Internal and external earth continuity is provided with an optional earth plate.
LED Indication:	A high intensity red LED can be fitted as an optional extra to indicate operation on versions up to 24V and all 'IS' versions.
Labelling:	BG Glass label – reads either (1) Fire Break glass – press here. (2) Break glass – press here. (3) Worded to customer requirements. (7) Dot and arrows – no text. Duty label – worded to customer requirements. Riveted on. Tag label – worded to customer requirements. Screwed on.
Switch Ratings:	d.c. 0-30v 5A (resistive) or 3A (inductive)
(1 or 2 changeover switches fitted)	30-50v 1A (resistive or inductive) a.c. 0-254V 5A (resistive or Inductive)

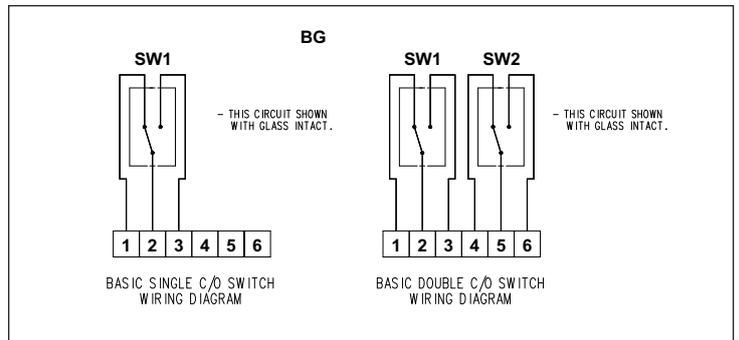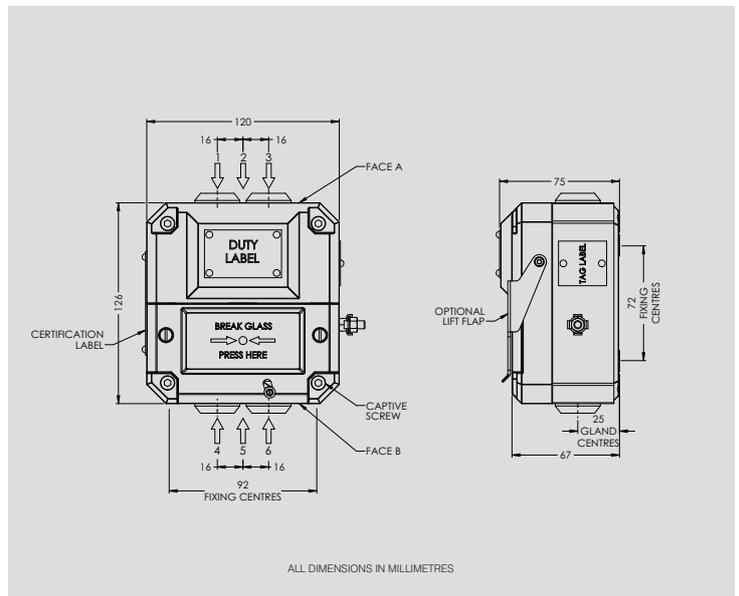

Temperature

Model	BGW	BGUL	BGE	BGI
	-40°C to +70°C	-25°C to +55°C	-20°C to +50°C	-40°C to +70°C

Ordering Requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box. **For standard products, available ex-stock, contact sales office for details.**

Model	Certification	Entries	Labels	Voltage	Switches	Options	Terminals	Finish																																																																							
BG																																																																															
<table border="1"> <thead> <tr> <th>Entries</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>M16</td> <td>*A</td> </tr> <tr> <td>M20</td> <td>*B</td> </tr> <tr> <td>1/2" NPT</td> <td>*C</td> </tr> </tbody> </table>		Entries	Code	M16	*A	M20	*B	1/2" NPT	*C	<table border="1"> <thead> <tr> <th>Label</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>None</td> <td>0</td> </tr> <tr> <td>Glass label (1) reqd.</td> <td>1</td> </tr> <tr> <td>Glass label (2) reqd.</td> <td>2</td> </tr> <tr> <td>Glass label (3) reqd.</td> <td>3*</td> </tr> <tr> <td>Duty label reqd.</td> <td>4*</td> </tr> <tr> <td>Tag label reqd.</td> <td>5*</td> </tr> <tr> <td>Glass label (7) reqd.</td> <td>7</td> </tr> </tbody> </table> <p>* Specify wording on 3, 4 or 5 as required.</p>		Label	Code	None	0	Glass label (1) reqd.	1	Glass label (2) reqd.	2	Glass label (3) reqd.	3*	Duty label reqd.	4*	Tag label reqd.	5*	Glass label (7) reqd.	7	<table border="1"> <thead> <tr> <th>Switches</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Single changeover</td> <td>S</td> </tr> <tr> <td>Double changeover</td> <td>D</td> </tr> </tbody> </table>		Switches	Code	Single changeover	S	Double changeover	D	<table border="1"> <thead> <tr> <th>Options</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>None</td> <td>N</td> </tr> <tr> <td>LED</td> <td>A</td> </tr> <tr> <td>Lift flap</td> <td>B</td> </tr> <tr> <td>Resistor series</td> <td>C*</td> </tr> <tr> <td>Resistor EOL</td> <td>D*</td> </tr> <tr> <td>Diode</td> <td>E†</td> </tr> <tr> <td>Earth continuity</td> <td>F</td> </tr> <tr> <td>Resistor series and EOL</td> <td>S*†</td> </tr> <tr> <td>Plastic element replaces</td> <td>P</td> </tr> <tr> <td>Break glass</td> <td></td> </tr> <tr> <td>Break glass hammer</td> <td>H</td> </tr> </tbody> </table> <p>* Specify values † Choose for BGE only - on the BG/W, choose C & D. ‡ Not available for UL versions.</p>		Options	Code	None	N	LED	A	Lift flap	B	Resistor series	C*	Resistor EOL	D*	Diode	E†	Earth continuity	F	Resistor series and EOL	S*†	Plastic element replaces	P	Break glass		Break glass hammer	H	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Red (standard)</td> <td>R</td> </tr> <tr> <td>Natural Black</td> <td>N</td> </tr> <tr> <td>Blue</td> <td>B</td> </tr> <tr> <td>Yellow</td> <td>Y</td> </tr> <tr> <td>Grey</td> <td>G</td> </tr> <tr> <td>Yellow/Black stripes</td> <td>X</td> </tr> <tr> <td>Special</td> <td>S*</td> </tr> </tbody> </table> <p>* Please specify</p>		Finish	Code	Red (standard)	R	Natural Black	N	Blue	B	Yellow	Y	Grey	G	Yellow/Black stripes	X	Special	S*
Entries	Code																																																																														
M16	*A																																																																														
M20	*B																																																																														
1/2" NPT	*C																																																																														
Label	Code																																																																														
None	0																																																																														
Glass label (1) reqd.	1																																																																														
Glass label (2) reqd.	2																																																																														
Glass label (3) reqd.	3*																																																																														
Duty label reqd.	4*																																																																														
Tag label reqd.	5*																																																																														
Glass label (7) reqd.	7																																																																														
Switches	Code																																																																														
Single changeover	S																																																																														
Double changeover	D																																																																														
Options	Code																																																																														
None	N																																																																														
LED	A																																																																														
Lift flap	B																																																																														
Resistor series	C*																																																																														
Resistor EOL	D*																																																																														
Diode	E†																																																																														
Earth continuity	F																																																																														
Resistor series and EOL	S*†																																																																														
Plastic element replaces	P																																																																														
Break glass																																																																															
Break glass hammer	H																																																																														
Finish	Code																																																																														
Red (standard)	R																																																																														
Natural Black	N																																																																														
Blue	B																																																																														
Yellow	Y																																																																														
Grey	G																																																																														
Yellow/Black stripes	X																																																																														
Special	S*																																																																														
<table border="1"> <thead> <tr> <th>Certification</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>ATEX/CENELEC - Ex ed</td> <td>EB</td> </tr> <tr> <td>ATEX/CENELEC - Ex ia</td> <td>IB</td> </tr> <tr> <td>IECEX - Ex ia</td> <td>IJ</td> </tr> <tr> <td>UL - Listed</td> <td>UL</td> </tr> <tr> <td>UL - Ordinary Locations</td> <td>UW</td> </tr> <tr> <td>GOST 'R' - Exi</td> <td>IG*</td> </tr> <tr> <td>GOST 'R' - Ex ed</td> <td>EG*</td> </tr> <tr> <td>CQST - Ex ed</td> <td>EQ†</td> </tr> <tr> <td>CQST - Exi</td> <td>IQ†</td> </tr> <tr> <td>Inmetro - Ex ed</td> <td>EM</td> </tr> <tr> <td>Inmetro - Exi</td> <td>IM</td> </tr> <tr> <td>Uncertified*</td> <td>WM</td> </tr> </tbody> </table> <p>* Prefix entry size (see diagram above) with entry position code e.g. 4B6B. UL versions only available with 1/2" NPT entries.</p>		Certification	Code	ATEX/CENELEC - Ex ed	EB	ATEX/CENELEC - Ex ia	IB	IECEX - Ex ia	IJ	UL - Listed	UL	UL - Ordinary Locations	UW	GOST 'R' - Exi	IG*	GOST 'R' - Ex ed	EG*	CQST - Ex ed	EQ†	CQST - Exi	IQ†	Inmetro - Ex ed	EM	Inmetro - Exi	IM	Uncertified*	WM	<table border="1"> <thead> <tr> <th>Voltage</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>a.c.</td> <td>A</td> </tr> <tr> <td>d.c.</td> <td>D</td> </tr> </tbody> </table>		Voltage	Code	a.c.	A	d.c.	D	<table border="1"> <thead> <tr> <th>Terminals</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>6 x 2.5mm (standard)</td> <td>6*</td> </tr> <tr> <td>7 x 2.5mm (standard)</td> <td>7</td> </tr> <tr> <td>9 x 2.5mm (optional)</td> <td>9</td> </tr> </tbody> </table> <p>* BGUL only available with six terminals</p>		Terminals	Code	6 x 2.5mm (standard)	6*	7 x 2.5mm (standard)	7	9 x 2.5mm (optional)	9																																		
Certification	Code																																																																														
ATEX/CENELEC - Ex ed	EB																																																																														
ATEX/CENELEC - Ex ia	IB																																																																														
IECEX - Ex ia	IJ																																																																														
UL - Listed	UL																																																																														
UL - Ordinary Locations	UW																																																																														
GOST 'R' - Exi	IG*																																																																														
GOST 'R' - Ex ed	EG*																																																																														
CQST - Ex ed	EQ†																																																																														
CQST - Exi	IQ†																																																																														
Inmetro - Ex ed	EM																																																																														
Inmetro - Exi	IM																																																																														
Uncertified*	WM																																																																														
Voltage	Code																																																																														
a.c.	A																																																																														
d.c.	D																																																																														
Terminals	Code																																																																														
6 x 2.5mm (standard)	6*																																																																														
7 x 2.5mm (standard)	7																																																																														
9 x 2.5mm (optional)	9																																																																														